

15" OVERLAY READY SOLID DOOR WINE CABINET

TWC-15-R/L-OP-C

TWC-15-R-OP-C (Right hinged)

TWC-15-L-OP-C (Left hinged)

FEATURES

- Environmentally friendly, R600a hydrocarbon refrigerant that improves performance and efficiency while ensuring quiet operation.
- Industry exclusive, 300-series stainless steel interior.*
- Zero-clearance hinging allows for integrated installation.
- Patented TruLumina® LED lighting gently illuminates your product and allows you to choose from 14 different color options with the push of a button.
- True Precision Control® with steel touch technology and readout provides digital accuracy.
- Temperature Range can be adjusted from 40°F (4.4°C) to 65°F (18.3°C).
- TrueFlex® shelving system allows for adjustable organization options.
- NSF/ANSI Standard 7 compliant for packaged food product.
- Sabbath mode compliant.
- All undercounter models UL rated for outdoor use.


ORGANIZATION

- 5 glide-out wine racks – 20 bottles.
- 1 floor wine cradle – 3 bottles.

BUILD YOUR TRUE

Customize your True with a variety of finish and hardware options at true-residential.com.

CUSTOMIZATION

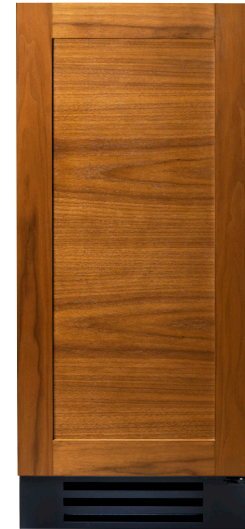

SPECIFICATIONS

Dimensions* (w x h x d) 14 7/8" x 34 1/4" x 23 7/8"

Cutout Dimensions (w x h x d) 15" x 34 1/2" x 24"

Standard Overlay Panel (w x h x d) 14 5/8" x 30 1/8" x 3/4"

Panel provided by others. Other installation options available. Consult install guide for details.

Capacity (cu. ft.) 3.1



Temperature Range 40°F - 65°F

Weight (lbs.) 170

Voltage 115/60/1 115/60/1 NEMA-5-15R

Amps 2

Annual Energy Consumption (kwh) 144

Power Cord Length (ft.) 8


Energy Star Rated Yes

*NOTE: Overlay models have black powder coated steel exteriors.

*Dimensions may vary +/- 1/8"

15" OVERLAY READY SOLID DOOR WINE CABINET

TWC-15-R/L-OP-C – (shown with a 3/4" cabinetry panel)

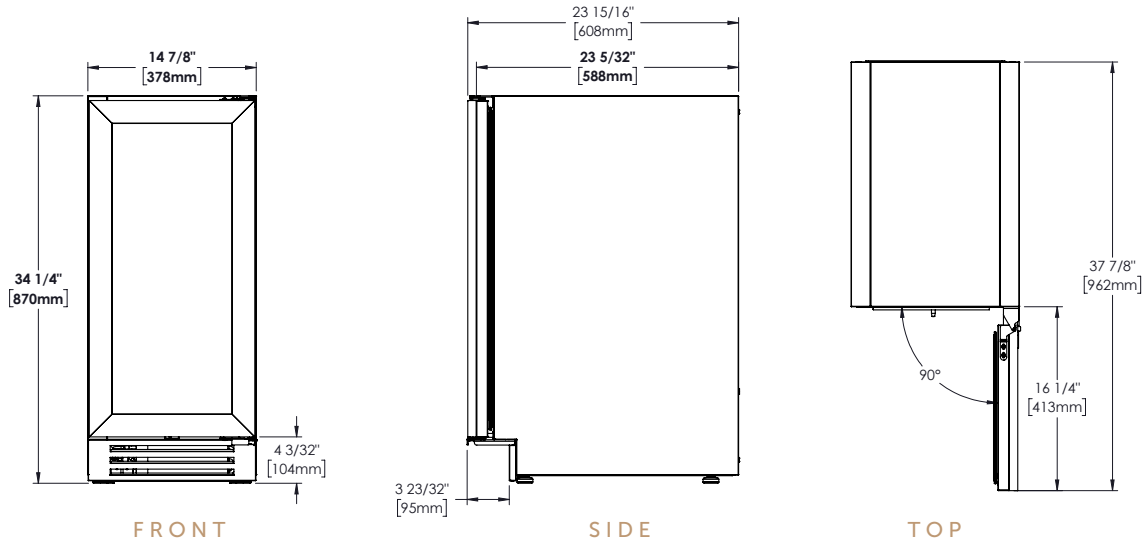

OPENING DIMENSIONS



MODEL OPTIONS

MODEL	FINISH
TWC-15-R-OP-C	Overlay solid door right-hinged
TWC-15-L-OP-C	Overlay solid door left-hinged

ACCESSORIES (OPTIONAL)

- Anti-condensation pads
- Glide-out wine shelf

WARRANTY

- 3 year full (parts & labor)
- 6 year sealed system (parts & labor)
- 7–12 year (parts only – sealed system on registered products)

