

24" OVERLAY READY GLASS DOOR DUAL ZONE WINE CABINET

TWC-24DZ-R/L-OG-C

TWC-24DZ-R-OG-C (Right hinged)

TWC-24DZ-L-OG-C (Left hinged)

FEATURES

- Environmentally friendly R600a refrigerant.
- Industry exclusive, 300-series stainless steel interior.*
- Zero-clearance hinging allows for integrated installation.
- Patented TruLumina® LED lighting gently illuminates your product and allows you to choose from 14 different color options with the push of a button.
- Low-E, double pane, UV tinted glass.
- True Precision Control® with steel touch technology and readout provides digital accuracy.
- 2 independent zones with dual evaporators that can be adjusted from 40°F (4.4°C) to 65°F (18.3°C).
- Sabbath mode compliant.
- Ability to connect to a home security system.
- All undercounter models UL rated for outdoor use.

ORGANIZATION

- 5 glide-out wine racks – 40 bottles.
- 1 floor wine cradle – 5 bottles.

BUILD YOUR TRUE

Customize your True with a variety of finish and hardware options at true-residential.com/custom.



TWC-24DZ-R-OG-C

SPECIFICATIONS

Dimensions (w x h x d) 23⁷/₈" x 34¹/₄" x 23⁷/₈"

Cutout Dimensions (w x h x d) 24" x 34¹/₂" x 24"

Standard Overlay Panel (w x h x d) 23⁵/₈" x 30¹/₈" x 3³/₄"

Panel provided by others. Other installation options available. Consult install guide for details.

Capacity (cu. ft.) 5.28  x45

Temperature Range – Upper Zone 40°F - 65°F

Temperature Range – Lower Zone 40°F - 65°F

Weight (lbs.) 245

Voltage 115/60/1  115/60/1 NEMA-5-15R

Amps 1.9

Annual Energy Consumption (kwh) 320


Power Cord Length (ft.) 8

Energy Star Rated —

*NOTE: Overlay models have black powder coated steel exteriors.

24" OVERLAY READY GLASS DOOR DUAL ZONE WINE CABINET

TWC-24DZ-R/L-OG-C – (shown with a 3/4" cabinetry panel)

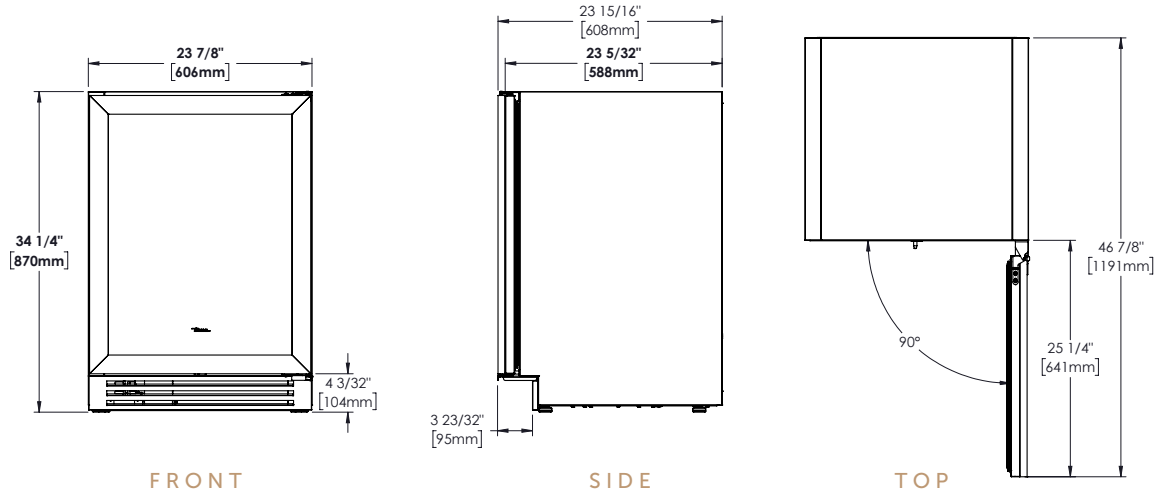

OPENING DIMENSIONS



MODEL OPTIONS

MODEL	FINISH
TWC-24DZ-R-OG-C	Overlay glass door right-hinged
TWC-24DZ-L-OG-C	Overlay glass door left-hinged

ACCESSORIES (OPTIONAL)

- Anti-condensation pads
- Glide-out wine shelf

WARRANTY

- 3 year full (parts & labor)
- 6 year sealed system (parts & labor)
- 7–12 year (parts only – sealed system on registered products)