

36" REFRIGERATOR WITH BOTTOM FREEZER & STAINLESS GLASS DOOR

TR-36RBF-R/L-SG-A

TR-36RBF-R-SG-A (Right hinged)

TR-36RBF-L-SG-A (Left hinged)

FEATURES

- Environmentally friendly, R600a hydrocarbon refrigerant that improves performance and efficiency while ensuring quiet operation.
- Industry exclusive, 300-series stainless steel interior and exterior.
- All stainless steel, beautifully crafted proud hinges pass True's rigorous one million door opening test.
- Ramp-up, showcase interior LED lighting provides amazing illumination throughout.
- Balanced refrigeration system with cascade airflow that enables even temperature throughout to keep food fresh.
- Built-in Ice Maker produces up to 3lbs./day of prism shaped ice with 5 lbs. storage capacity.
- Beautifully crafted glass door with stainless steel frame, 120° stay-open feature and ergonomically designed, robust, tubular handles.
- Dual evaporator and dual compressor enable dedicated cooling systems for each zone.
- Energy efficient, Low-E, double pane thermal glass door.

ORGANIZATION

Refrigerator

- 4 adjustable/removable stainless steel encapsulated glass half-shelves.
- 1 adjustable/ removable stainless steel encapsulated glass full-width shelf.
- 1 fixed stainless steel encapsulated full-width glass shelf.
- 1 full-extension/full-width drawer with 2 removable dividers.
- 2 half-width, deep drawers with 2 removable dividers, ideal for produce storage.

Freezer

- 2 tiered drawers with nested pull-out drawer and top shelf.
- Built-in Ice Maker.


BUILD YOUR TRUE

Customize your True with a variety of finish and hardware options at true-residential.com.

CUSTOMIZATION




SPECIFICATIONS

Dimensions* (w x h x d)	36" x 84" x 24"
Cutout Dimensions (w x h x d)	
Flush Opening	36¼" x 84¼" x 26"
Standard Opening	35½" x 83¾" x 24"
Total Capacity (cu. ft.)	22.6
Capacity (cu. ft.) – Refrigerator	17.5
Capacity (cu. ft.) – Freezer	5.1
Temperature Range – Refrigerator	33°F – 42 °F
Temperature Range – Freezer	-4°F – 4°F
Water Supply	¼" O.D. braided stainless steel or PEX tubing (¼" O.D. lines and fittings not included). Note: Copper line is not recommended.
Flow Rate (gpm/lpm)	0.5 / 1.89
Operating Pressure psi (kPa)	30 (207) – 100 (689)
Incoming Water Temperature	33 – 100°F (0.6 – 38°C)
Weight (lbs.)	720
Voltage	115/60/1  115/60/1 NEMA-5-15R
Amps	1.8
Annual Energy Consumption (kwh)	636
Refrigerant Type	r600a
Power Cord Length (ft.)	9
Energy Star Rated	No

*Dimensions may vary +/- 1/8"

36" REFRIGERATOR WITH BOTTOM FREEZER & STAINLESS GLASS DOOR

TR-36RBF-R/L-SG-A

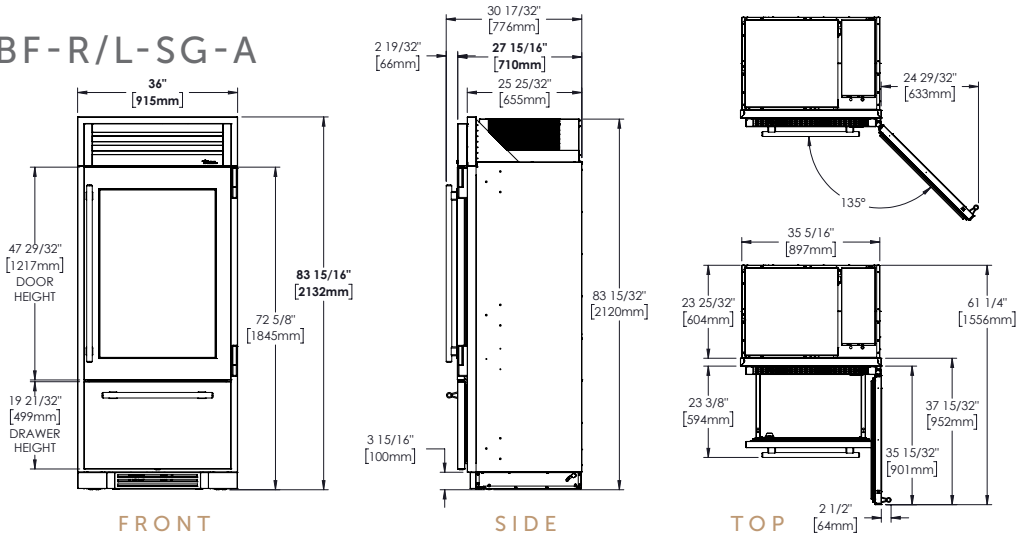

OPENING DIMENSIONS


FLUSH OPENING

WIDTH	HEIGHT	DEPTH
36 1/4"	84 1/4"	26"

STANDARD OPENING*

WIDTH	HEIGHT	DEPTH
35 1/2"	83 3/4"	24"

*Standard Opening dimensions apply to models produced after April 2024. Please consult factory for clarification / questions.

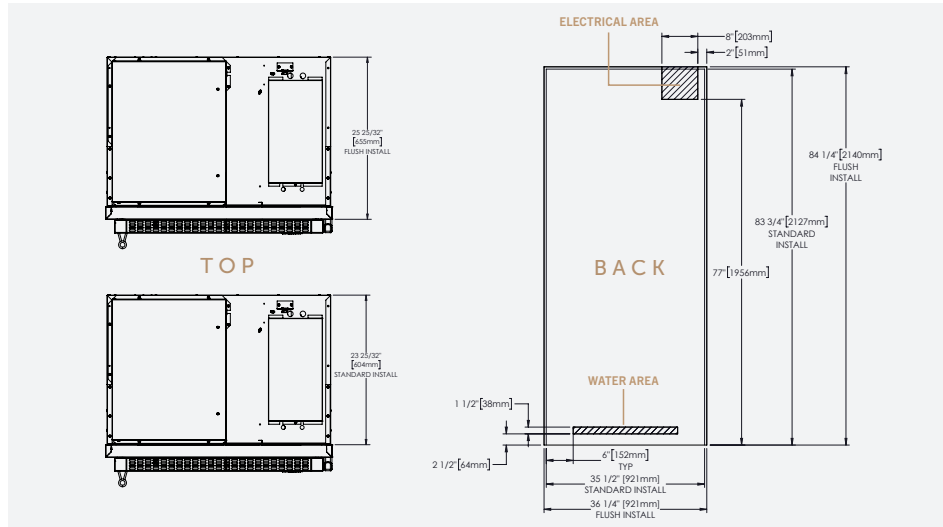

MODEL OPTIONS

MODEL	FINISH
TR-36RBF-R-SG-A	Stainless glass door right-hinged
TR-36RBF-L-SG-A	Stainless glass door left-hinged

NOTE

If joining with or installing next to another True Column or Side-by-Side, the True Column or Side-by-Side must be special ordered in order for the handles to align. Consult install guide for questions.



ACCESSORIES (OPTIONAL)

- Joining kit
- Side panel(s)
- 90° door stop
- Full size anti-condensation pad

WARRANTY

- 3 year full (parts & labor)
- 6 year sealed system (parts & labor)
- 7-12 year (parts only – sealed system on registered products)